

NOVEL METHOD FOR PAPR REDUCTION IN OFDM USING CASCADING OF COMPANDING TECHNIQUE AND SELECTIVE MAPPING

Sandeep Singh Bhadoriya^{*1}, Mrs. Rinkoo Bhatia²

^{*1,2} ITM Gwalior (M.P.)

Abstract

In this paper we propose a new approach for peak-to-average power ratio (PAPR) reduction for an orthogonal frequency division multiplexing (OFDM) system. Although several PAPR reduction algorithms exist in the literature, they are often only effective for specific scenarios. In our proposed algorithm, a technique is described for reducing the PAPR of OFDM signals by Cascading of Selective mapping (SLM) and Companding methods.

Keywords— Peak-to-average power ratio (PAPR), orthogonal frequency division multiplexing, (OFDM), Selective mapping (SLM), Companding.

Introduction

ORTHOGONAL Frequency Division Multiplexing (OFDM) is a multicarrier transmission scheme that has become the technology of choice for next generation wireless and wired digital communication systems because of its high speed data rates, high spectral efficiency, high quality service and robustness against narrow band interference and frequency selective fading. On the other hand, one of the major drawbacks of OFDM signal is its large envelope fluctuation, likely resulting in large peak-to-average power ratio (PAPR) at the transmitter [1]. When the OFDM signals with high PAPR are transmitted through a nonlinear device, such as a high-power amplifier (HPA) or a digital-to-analog converter (DAC), a high peak signal generates out-of-band energy and in-band distortion. These degradations would seriously affect the performance of OFDM systems.

In order to reduce the PAPR of OFDM systems, methods [2]–[8] have been studied for a few years. The researches [4]–[6] reduce the computational complexity for the SLM scheme. The authors in [7] reduce the computational complexity for the PTS scheme. The researches [4]–[7] maintain the original BER of OFDM systems but require a large number of computational complexity and side information.

The μ -law companding scheme [8] is a common companding scheme. Then, the other companding scheme [9] utilizes a nonlinear operation to transform the original OFDM signals into the uniform distribution and efficiently reduce PAPR with a low Bit Error Rate (BER). Similarly, the exponential companding scheme [10] transforms the amplitude of the original OFDM signals into the uniform distribution. The referred uniformly distributed companding schemes [9], [10] can keep the same average power as that of the original signal and significantly outperform the μ -law companding scheme [8]. Furthermore, the piecewise nonlinear companding scheme [11] has been also proposed to compare with the exponential companding scheme [10], i.e. one uniformly distributed uniformly-distributed scheme [9]. Although the uniformly-distributed scheme [9] can offer the efficient PAPR reduction with low BER, it cannot fulfill the performance requirements for various systems.

Method

Companding

In companding the OFDM signal is compressed at the transmitter and expanded at the receiver. Compression is performed according to the well known μ -Law viz.

$$y = V \frac{\log\left(1 + \mu \frac{|x|}{V}\right)}{\log(1 + \mu)} \text{sgn}(x) \quad \dots\dots (1)$$

* Corresponding Author

E. mail: sandeepsbhadoriya@gmail.com

Where V is the peak amplitude of the signal, and x is the instantaneous amplitude of the input signal. Decompression is simply the inverse of (1). Compression improves the quantization resolution of small amplitude signals at the cost of lowering the resolution of large signals. This also introduces quantization noise; however, the effect of the quantization noise due to reduction in resolution of the peaks is relatively small as the peaks occur less frequently. The compression algorithm as described by amplifies the signals of lower amplitude with the peaks remaining unchanged.

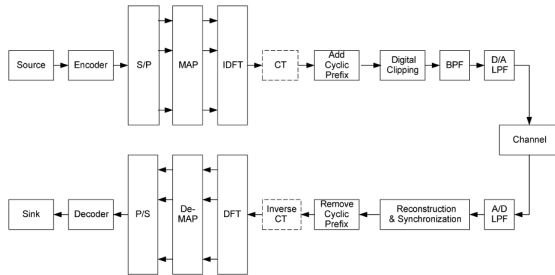


Figure 2: Block diagram of the SLM technique with U different signal representation and phase weights to produce a minimized PAPR signal.

Let us denote the modified data block for the u^{th} phase sequence

$$D^{(u)} = [D0b_{u,0}, D1b_{u,1}, \dots, DN-1b_{u,N-1}]^T$$

$u = 1, 2, \dots, U$, after applying SLM to X , the multi-carrier signal becomes

$$d_k^{(u)} = \sum_{n=0}^{N-1} D_n \cdot b_{u,n} \cdot e^{j \frac{2\pi n k}{N}} \quad 0 \leq k \leq N - 1$$

Among the modified data blocks $D^{(u)}$, the one with the lowest PAPR is Selective for transmission. Information about the Selective phase sequence needs to be transmitted to the receiver as side information. At the receiver, the reverse operation is performed to recover the original data block.

Simulation & Results

The simulation shows the PAPR reduction using cascading of Selective mapping and Companding technique.

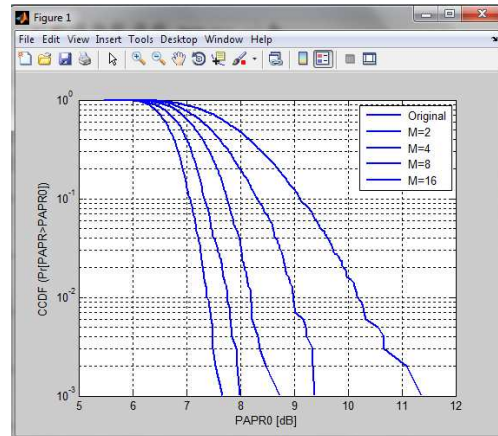


Figure3: Selective Mapping; for $m, m=16$ we got reduction in PAPR

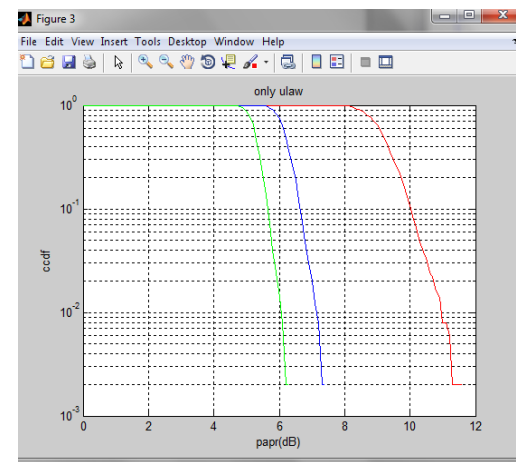


Figure3:Companding technique

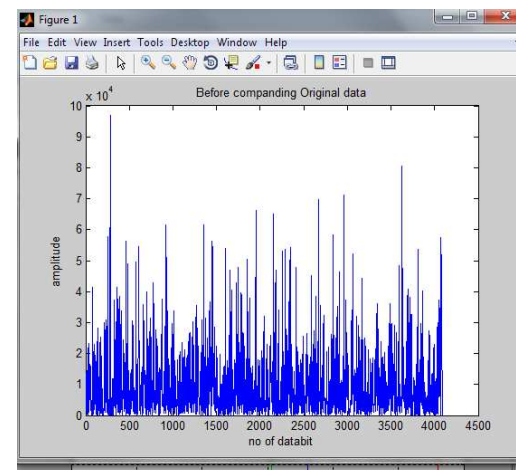


Figure4: signal given to companding

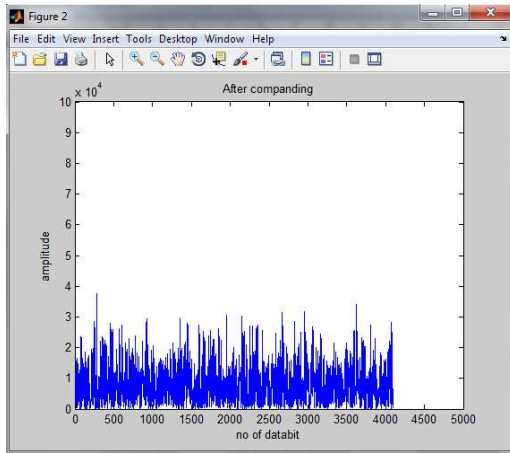


Figure5: signal after companding

Conclusions

A new PAPR reduction scheme for OFDM systems is proposed in this project. Technique of reducing the PAPR of OFDM signals by Cascading of Selective and Companding methods has been presented in this paper. Simulation results has shown that the companded OFDM transmissions could overcome peak power problems, In general, these results have demonstrated that reduction in PAPR can be significant when companding is cascaded with Selective mapping technique.

Future research will concentrate on investigating and quantifying further the influence of PAPR as a function of different modulation mapping schemes, OFDM subcarrier levels, companding PR levels and phasing schemes.

References

1. J. Tellado, "Multicarrier transmission with lowPAR," Ph.D. dissertation, Stanford Univ., Stanford, CA, 1998.
2. S. H. Han and J. H. Lee, "An overview of peak-to-average power ratio reduction techniques for multicarrier transmission," *IEEE Wireless Commun.*, vol. 12, pp. 56–65, Apr. 2005.
3. T. Jiang and Y. Wu, "An overview: Peak-to-average power ratio reduction techniques for OFDM signals," *IEEE Trans. Broadcast.*, vol. 54, no. 2, pp. 257–268, Jun. 2008.
4. C. P. Li, S. H. Wang, and C. L. Wang, "Novel low-complexity SLM schemes for PAPR reduction in OFDM systems," *IEEE Trans. Signal Process.*, vol. 58, no. 5, pp. 2916–2921, May 2010.
5. J. H. Wen, S. H. Lee, and C. C. Kung, "SLM-based data position permutation method for PAPR reduction in OFDM

systems," in *Wireless Communication and Mobile Computing*. Hoboken, NJ: Wiley Inter-Science, 2008.

6. . H. Wang and C. P. Li, "A low-complexity PAPR reduction scheme for SFBC MIMO-OFDM systems," *IEEE Signal Process. Lett.*, vol. 16, no. 11, pp. 941–944, Nov. 2009.
7. N. T. Hieu, S. W. Kim, and H. G. Ryu, "PAPR reduction of the low complexity phase weighting method in OFDM communication system," *IEEE Trans. Consum. Electron.*, vol. 51, no. 3, pp. 776–782, Aug. 2005.
8. X. B. Wang, T. T. Tjhung, and C. S. Ng, "Reduction of peak-to-average power ratio of OFDM system using a companding technique," *IEEE Trans. Broadcast.*, vol. 45, no. 3, pp. 303–307, Sep. 1999.
9. T. Jaing, W. Xiang, P. C. Richardson, D. Qu, and G. Zhu, "On the nonlinear companding transform for reduction in PAPR of MCM," *IEEE Trans. Wireless Commun.*, vol. 6, no. 6, pp. 2017–2021, Jun. 2007.
10. T. Jiang, Y. Yang, and Y. Song, "Exponential companding transform for PAPR reduction in OFDM systems," *IEEE Trans. Broadcast.*, vol. 51, no. 2, pp. 244–248, June 2005.
11. J. Hou, J. Ge, D. Zhai, and J. Li, "Peak-to-average power ratio reduction of OFDM signals with nonlinear companding scheme," *IEEE Trans. Broadcast.*, vol. 56, no. 2, pp. 258–262, Jun. 2010.