

INTERNATIONAL JOURNAL OF ENGINEERING SCIENCES & MANAGEMENT
OPTIMIZATION IN INDUSTRIAL STEEL BUILDING BY USING DIFFERENT
SECTION

Rengade Disha^{*1}, Khaire Komal², Neharkar Priyanka³, Shejwal Pranali⁴ & Gunjal Akash⁵

^{*1,2,3&4}Student, Department of Civil Engineering, Jaihind College of Engineering, Kuran, Pune, India

⁵Assistant Professor, Department of Civil Engineering, Jaihind College of Engineering, Kuran, Pune, India.

ABSTRACT

Buildings & houses are the oldest construction activities of human beings. The construction technology has advanced since the beginning of primitive construction technology to the present a concept of modern house buildings. The present construction methodology for buildings brought for the best aesthetic look, high quality & fast construction, cost effective & innovative appearance. Pre-Engineered Steel Buildings are manufactured or produced in the plant itself. The detailed structural members are designed for their respective location and are numbered, which cannot be altering because members are manufactured with respect to design features. An efficiently designed pre-engineered building can be lighter than the conventional steel buildings by till 30%. Lighter weight equates to less steel and potential cost savings in a structural framework.

This also covers the advantages of hollow sections in its effectiveness to reduce corrosion, minimizing the overall cost of the plant, and improvements in aesthetic value. The study involves the comparative analysis of industrial steel building using sections under the influence of usual loading values. It also covers a comparative study of sectional properties and its attributes and wide applications in architectural, industrial, infrastructural and general engineering.

Keywords: : IS 800-2007, IS 806, IS 2062, IS 875, IS 1161

I. INTRODUCTION

Experience in past earthquakes has demonstrated that many common buildings and typical methods of construction How to meet the housing and infrastructural needs of society in a sustainable manner in unquestionably most important challenge confronting the steel industry today. This study about design components of the industrial building using open sections, tubular sections, and pre-engineering concept. These sections are designed by using most suitable cross sections according to dead load, live load, wind load, etc. As a result the structure will lose its weight up to 35% during the specified life span. In PEB construction is simple design easy to construct and light in weight both time and cost of erection are minimized. Outstanding architectural design can achieve at low cost using standard architectural features and interface details. In conventional steel building, special architectural design and features must be developed for each project which often required results and thus resulting in much higher cost. Future expansion would more difficult and more likely, costlier than tubular sections and open sections.


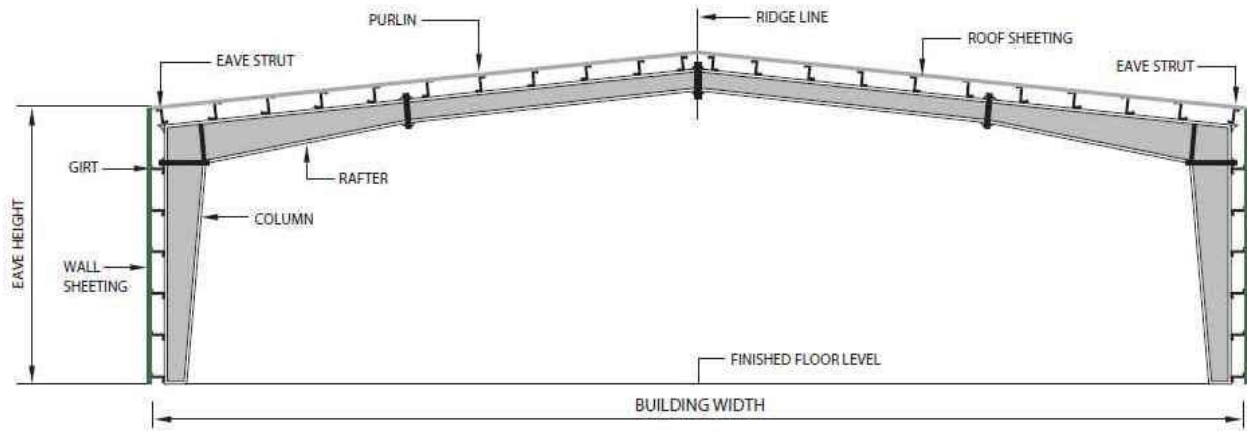


Fig.1 Typical Cross section of PEB

II. ANALYSIS AND DESIGN

Data required for analysis and design of Industrial Shed,
Plan Area= 640mm²
Location= Pune; Roof Truss=Pratt

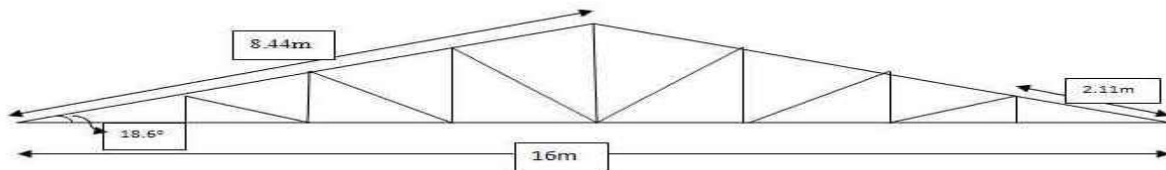

Geometry :- Span=16m ; $\theta = 18.6^\circ$
8Panel point spacing of purlins=1.75m
Type of sheet= G.I.; Length of sheet=3.05m
Sloping length=8.44m
Spacing of truss=4m; No. of trusses= 8

Table 1: Load combinations of members

	1.5(DL+LL)	NATURE	1.5(DL+WL)	NATURE	1.2(DL+LL+WL)	NATURE
TIE						
L ₀ L ₁	103.98	T	64.32	C	7.764	C
L ₁ L ₂	103.98	T	64.32	C	7.764	C
L ₂ L ₃	89.94	T	50.34	C	2.064	C
L ₃ L ₄	92.16	T	26.58	C	25.092	T
Principal rafter						
L ₀ U ₁	109.72	C	88.305	T	28.14	T
U ₁ U ₂	103.33	C	77.16	T	15.42	T
U ₂ U ₃	76.335	C	56.88	T	13872	T
U ₃ U ₄	52.72	C	33.28	T	5.124	T
Strut						
U ₁ L ₁	0		0		0	
U ₂ L ₂	4.39	T	5.01	C	2.172	C
U ₃ L ₃	6.19	T	7.92	C	3.576	C
U ₄ L ₄	7.5	T	8.95	C	3.948	C

Sling						
U ₁ L ₂	13.86	C	0.69	T	5.232	C
U ₂ L ₃	19.47	C	24.82	T	11.196	T
U ₃ L ₄	23.58	C	28.06	T	12.336	T

III. SUMMARY

Table 2: Summary of Sections in Structure

Sr. No.	Description	Open Section	Tubular Section
1	Principal Rafters	2 ISA 60x60x5	90mm N.D ; 101.6mm O.D of Light weight
2	Main Ties	2 ISA 50x50x6	
3	Struts	ISA 50x50x6	
4	Slings	ISA 50x50x6	
5	Purlins	ISMC125	50mm N.D
6	Columns	ISLB250	ISLB 250

IV. RESULTS AND DISCUSSION

Table 3: Comparison of Sections

	Open	Tubular	PEB
Weight of 10truss with column (MT)	14.362	9.018	11.038
Rate of truss (Rs.)	1196534.96	751318.072	919609.104

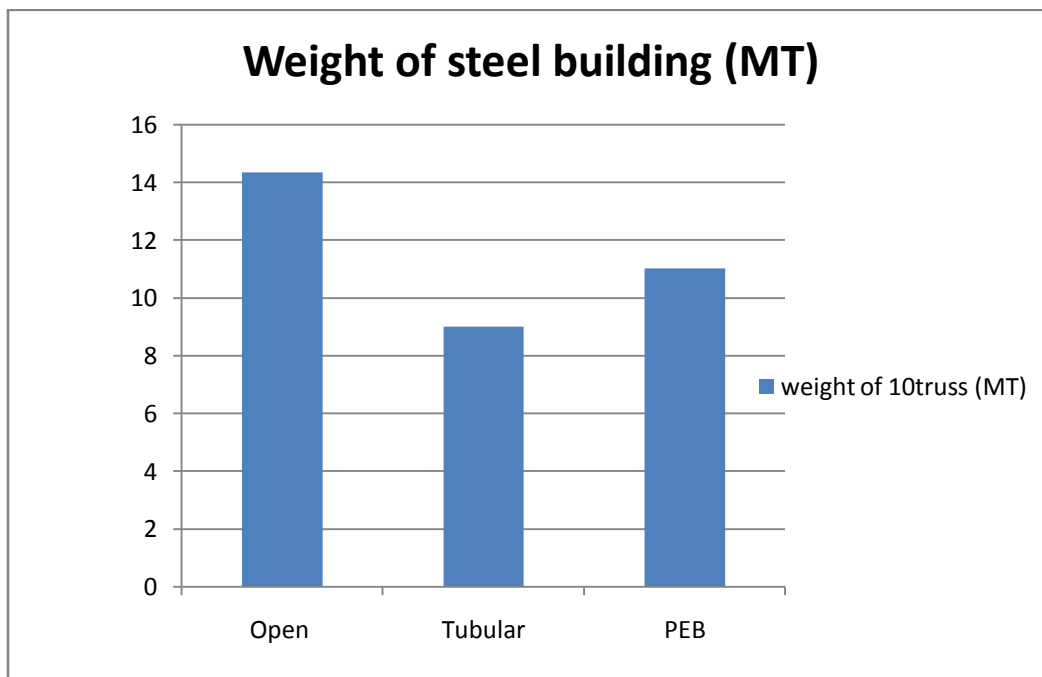


Fig. 1. Weight comparison between sections

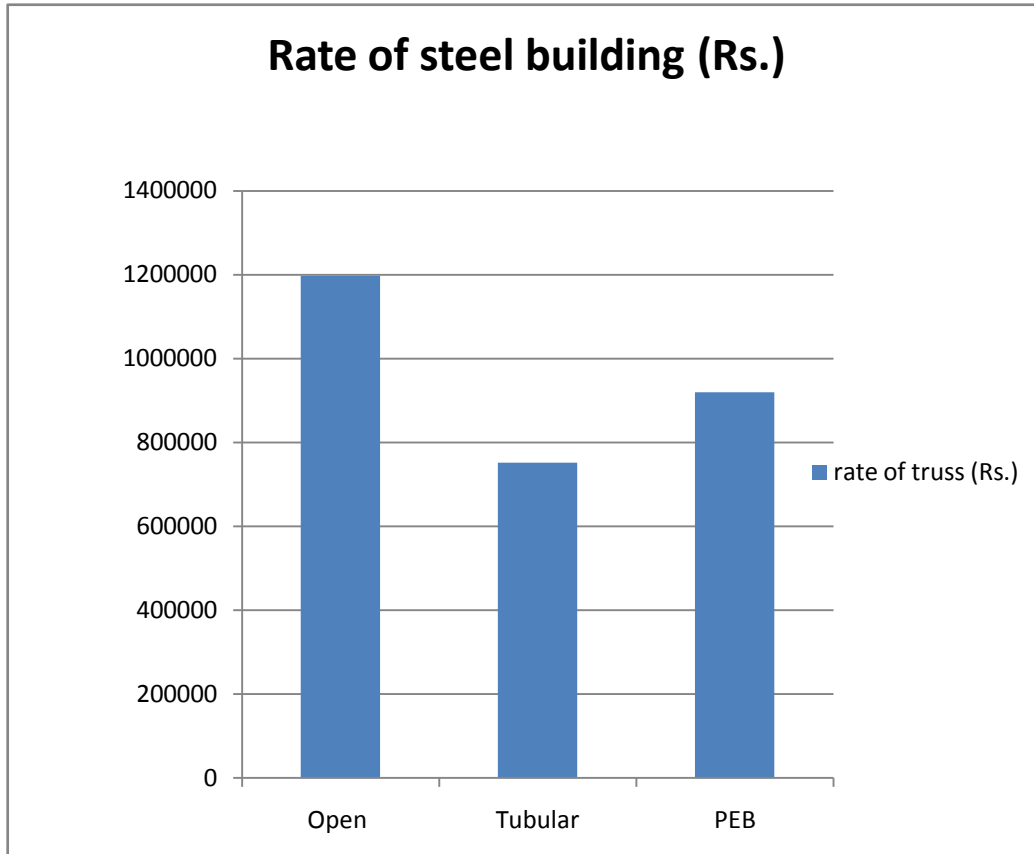


Fig.2. Rate Comparison with sections

V. CONCLUSION

From analysis and design, it is proved that steel requirement for erecting steel a structure using hollow section is very low as compared to structure constructed using conventional section. Though, the cost of erection of hollow section is more than a conventional section, the material requirement is tremendously reduced in the structure using hollow section.

Hollow sections have excellent mechanical, geometrical, tensile, compressive and bending characteristics for exposed conditions and aggressive environments. Thus from estimation, we came to the conclusion that cost of erection and manufacturing in the case of hollow section is reduced by half of that of a conventional section.

The pre-engineering building has cost and times of erection are minimized as compare to conventional and hollow sections. It was found that there is saving of 35 to 50 % in tubular sections and 35 to 45% in PEB in steel work and saving of cost in open sections and tubular sections are 30 to 50% and open sections and PEB 20 to 30%.

REFERENCES

1. J. Wardenier CIDECT(Comité International pour le Développement et l'Etude de la Construction Tubulaire)HOLLOW SECTIONS IN STRUCTURAL APPLICATIONS
2. A.Jayaraman1, R Geethamani2, N Sathyakumar3, N Karthiga Shenbagam4 pISSN: 2321-7308 Volume: 03 Issue: 10 | Oct-2014, DESIGN AND ECONOMICAL OF ROOF TRUSSES & PURLINS (COMPARISON OF LIMIT STATE AND WORKING STRESS METHOD)
3. M.G.Kalyanshetti, G.S. Mirajkar ISSN: 2248-9622 Vol. 2, Issue 6, November- December 2012, pp.1460-14 "Comparison Between Conventional Steel Structures And Tubular Steel Structures " M.G.Kalyanshetti, G.S. Mirajkar

4. *IS : 875 (Part 1) - 1987 (Incorporating IS: 1911 - 1967) (Reaffirmed 2003) Indian Standard CODE OF PRACTICE FOR DESIGN LOADS (OTHER THAN EARTHQUAKE) FOR BUILDINGS AND STRUCTURES PART 1 DEAD LOADS - UNIT WEIGHTS OF BUILDING MATERIALS AND STORED MATERIALS(Second Revision)*
5. *IS : 875 (Part 2) - 1987 (Reaffirmed 1997) CODE OF PRACTICE FOR DESIGN LOADS (OTHER THAN EARTHQUAKE) FOR BUILDINGS AND STRUCTURES PART 2 IMPOSED LOADS*
6. *IS 875(Part3)-1987 CODE OF PRACTICE FOR DESIGN LOADS (OTHER THAN EARTHQUAKE) FOR BUILDINGS AND STRUCTURES Part 3 WIND LOADS*
7. *IS : 806-1968 . (Reaffirmed 2008) Indian Standard CODE OF PRACTICE FOR USE OF STEEL TUBES IN GENERAL BUILDING CONSTRUCTION (First Revision)*
8. *Sagar D. Wankhade1, Prof. P. S. Pajgade2 IS 1161:1998 STEEL TUBES FOR STRUCTURAL PURPOSES - SPECIFICATION (Fourth Revision) Volume 3, Issue 6 (June 2014), PP.13-29 “ Design & Comparison of Various Types of Industrial Buildings”*
9. *Syed Firoz, Sarath Chandra Kumar B, S.Kanakambara Rao Vol. 2, Issue 2, Mar-Apr 2012, “DESIGN CONCEPT OF PRE ENGINEERED BUILDING” Syed Firoz1, Sarath Chandra Kumar B1, S.Kanakambara Rao.*